


The Lasdrop Original “Bellows” seal is a face seal that features a vibration absorbing bellows, ideal for use on sailboats and work boats. Specially balanced for smooth rotation, this model utilizes a 316 stainless steel and carbon graphite for its sealing surfaces. Like all Lasdrop models, a water lubricated bearing is designed in the assembly to insure correct alignment with the shaft.

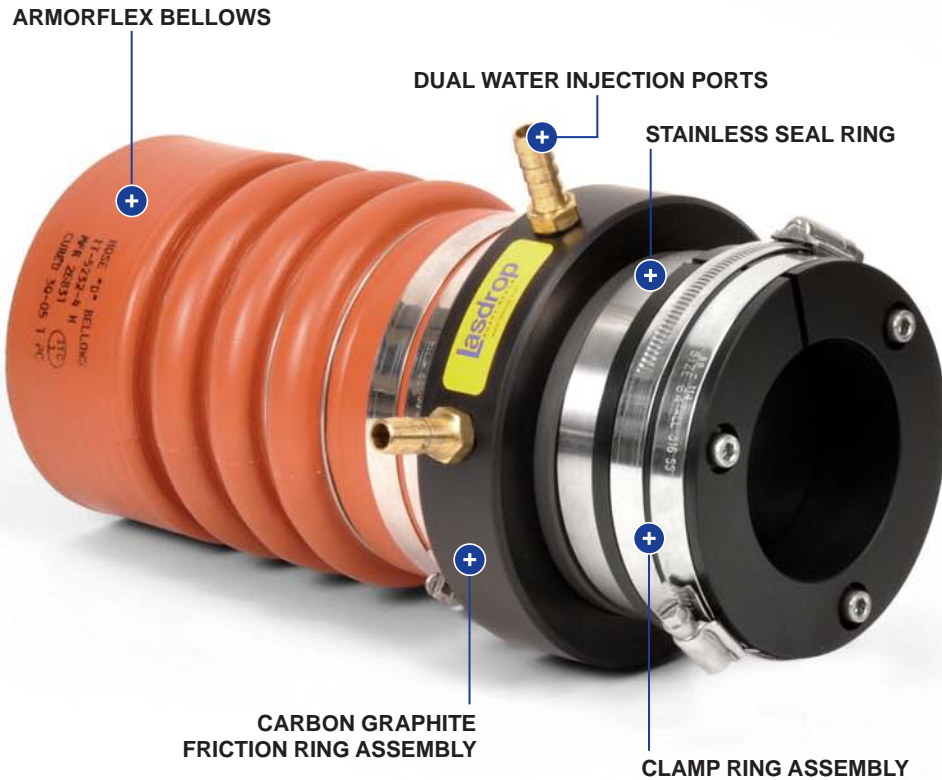

# BELLOWS SEAL

- Clamp Ring assembly uses two clamps for maximum strength and proper balancing, preventing galling and damaging to the shaft.
- Seal Ring is 316 stainless steel, set in a counter bore in the clamp ring assembly, eliminating metal to metal contact and risk of electrolysis.
- To insure “O” ring is not damaged during installation, it is clamped to the shaft after the assembly reaches its final location.
- AMORFLEX Bellows constructed of vulcanized silicon with three layers of fiberglass insuring the most durable bellows on the market.
- Available in shaft sizes of ¾” to 8” (100mm to 200mm) in diameter with a stern tube of up to 10 ½”.
- Dual water injection including all necessary hardware. (AR-078 and AR-100 on demand)
- All units have dual water injection ports including necessary hardware. For 7/8” to 1” seals, dual port available upon request.
- Rated “Best” by *Powerboat Reports*.

#### Nautical Specialties:

Phone 1-800-940- SEAL (7325)

Fax 1-586-468-3989

[www.Lasdrop.com](http://www.Lasdrop.com)

Designed & Engineered in the USA